File Edit View Go Bookmarks Options Directory Windows Help
Home Edit Reload Open Find Find
Location: file:///A|/Infiniti/Infiniti-2000HL.htm

# Infiniti 2000 HL

## Models and Specifications

| Model | Cabinet | Processor/Speed | Expansion Slots | Drive Bays |
|---|---|---|---|---|
| Infiniti 2000 HL T6300AB | Midtower | Intel Celeron@300 MHz* | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |
| Infiniti 2000 HL T6333B | Midtower | Intel Celeron@333 MHz* | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |
| Infiniti 2000 HL T7300B | Midtower | Intel Pentium II@300 MHz | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |
| Infiniti 2000 HL T7333B | Midtower | Intel Pentium II@333 MHz | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |
| Infiniti 2000 HL T8350B | Midtower | Intel Pentium II@350 MHz | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |
| Infiniti 2000 HL T8400B | Midtower | Intel Pentium II@400 MHz | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |
| Infiniti 2000 HL T8450B | Midtower | Intel Pentium II@450 MHz | 3 PCI, 1 ISA, 1 ISA/PCI, 1 AGP | 3x5.25" F.A., 2x3.5" F.A., 1x3.5" Internal |

Manageability – LDCM. Performance – PC100. Upgradability – Pentium II@450 MHz, 768 MB PC 100 SDRAM memory.
The ideal machine for today that addresses tomorrow's needs. Bundled with Intel LDCM and Norton Antivirus[1], this Infiniti ensures that you maximise on your computer usage.

## Standard Features

| | |
|---|---|
| **Model/Processor type/Speed** | Infiniti 2000 HL with Intel Celeron 300 or 333 MHz* or Intel Pentium II processor from 266 MHz to 450 MHz on Slot 1; 32 KB L1 cache; Front side bus speed: 100 MHz for Pentium II@350 to 450 MHz (66 MHz otherwise); Internal architecture: 32-bit PCI/16-bit ISA; Address bus: 32-bit; Data bus: 64-bit |
| **Processor socket** | Slot 1 connector |
| **System memory** | Type: PC 100 SDRAM memory (1) Speed: 10-12 ns; Configuration: Three 132-pin DIMM sockets; Upgradability: Up to 768 MB SDRAM |
| **Chipset** | Intel 440BX |
| **Cache** | 512 KB SEC L2 cache for Pentium II, 128 KB for Celeron |
| **Bus architecture** | 32-bit PCI/16-bit ISA |
| **BIOS** | Flash ROM BIOS; Support for Plug and Play BIOS |
| **Graphics card** | Support for PCI VGA 1 MB or 2 MB; AGP VGA with 2 MB or 4 MB; AccelStarII with 8 MB on AGP or higher |
| **Monitor** | Support for 14", 15", 17", 19" or 21" non-interlaced, digital colour monitor with/without speakers |
| **Diskette drive** | Support for 3.5", 1.44 MB; 5.25", 1.2 MB |
| **CD-ROM drive** | Support for 5.25", 32X max EIDE or higher |
| **Audio** | Support for two self-amplified speakers; 16-bit sound card with 3D sound; Mike |
| **Hard disks and hard disk drive controller** | Support for 2, 4.3, 6.4 GB or higher hard disk on dual channel PCI EIDE bus master hard disk controller with support for Ultra ATA 33 MB/s; support for SCSI HDDs with add-on card |
| **Networking card** | Support for 10 Mbps, 10/100 Base-T Enet card with/without remote boot on PCI bus; 10/100 Ethernet card with Wake On LAN support on PCI bus |
| **Slots** | Seven, total: Three PCI, one PCI/ISA, two ISA, 1 AGP |
| **External ports** | Enhanced parallel (ECC/EPP): One D-type female 25-pin High-speed 16550-compatible serial: Two D-type male 9-pin; VGA graphics: One D-type female 15-pin; Universal serial bus: Two USB ports; Keyboard: One PS/2-compatible 6-pin mini DIN; Mouse: One PS/2-compatible 6-pin mini DIN |
| **Power supply** | True 250 W ATX Surge Tolerant PS |
| **Multilevel security** | Built-in BIOS password protection; User and supervisor passwords; Flash ROM write protection; Diskette drive boot control |
| **Manageability** | DMI compliant with Intel LANDesk Client Manager S/W with local and remote viewer on models with hard disk drives |
| **Bundled Software[2]** | Norton Antivirus; Microsoft® Internet Explorer™; System-specific drivers; System-specific utilities; Intel LANDesk Client Manager |
| **Operating systems supported** | Windows 95, Windows 98, WindowsNT WorkStation 4.0, WindowsNT Server, SCO OS and Novell |
| **Other standard features** | Hardware enabled management; Bus master EIDE support for Ultra DMA 33 MB/s; Rugged, available tower solution; Microsoft Intellimouse with wheel; Windows mechanical keyboard with 104 keys; Front reset button |
| **Power management and ergonomics** | ACPI compliant; DPMS compliant BIOS; Energy Star compliant; Advanced power management; Soft power off; Suspend mode |
| **Y2K compliant** | NSTL Test Kit compliant |

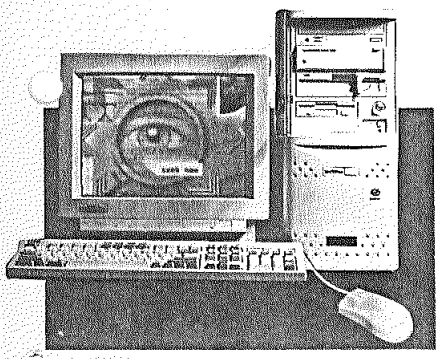

*All of the above are features/options supported by the Infiniti 2000 HL and are not included by default.*
**With 128 KB cache*
*[1]Only with Infiniti 2000 HL T8350B or above (with disk and Windows preloaded models).*
*[2]Only on models with hard disk and Windows OS preloaded.*

Document Done