


PROPOSED
RETAINING WALL
AS PER SITE CONDITION

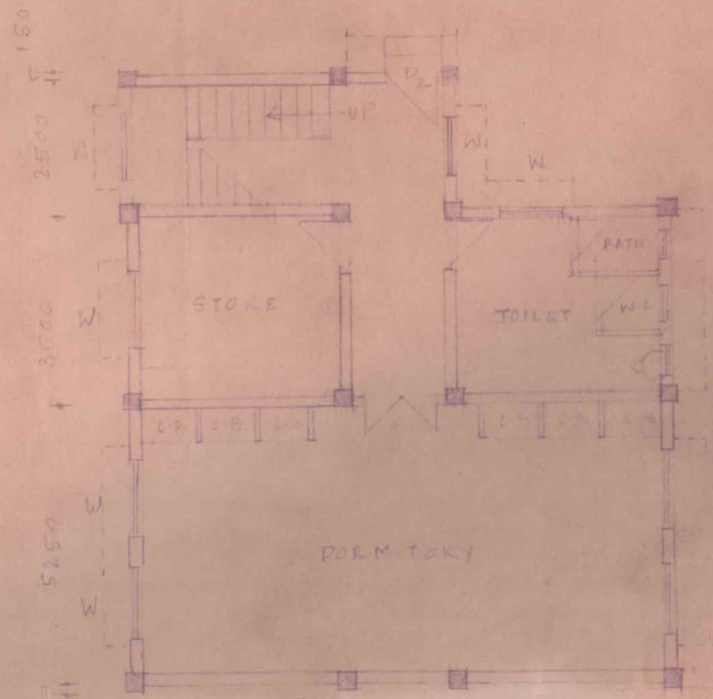

BASEMENT FLOOR PLAN

SKIRTING

- SHALL MATCH WITH THE FLOOR FINISH

DADO

- KITCHEN SHALL HAVE GLAZED CERAMIC TILE
DADO ABOVE WORKTOP UP TO A HT OF 800
- IN TOILET & GLAZED CERAMIC TILES UP TO 1500

WALL TILES

- IN KITCHEN SHALL BE OF KOTA STONE

DOOR

- ENTRANCE DOOR SHALL BE ALUMINIUM FRAMED
PANELLED DOOR
ALL OTHER DOORS SHALL BE WOODEN FLUSH
DOOR EXCEPT TOILET DOORS WHICH
SHALL BE OF PVC

WINDOWS

- SHALL BE ALUMINIUM FRAMED GLAZED WINDOWS
WITH AL GRILLS

RAILING

- STANDARD STAIRCASE SHALL HAVE
STAINLESS STEEL RAILING

ROOFING

- SHALL BE OF FACTORY PAINTED CORRUGATED
OVER SUTABLE M.S. TUBULAR TRUSS.

SCHEDULE OF DOORS, WINDOWS & VENTILATORS

ITEM	DESCRIPTION	WIDTH	HEIGHT	REP
D1	ALUMINIUM FRAMED PANELLED DOOR - DOUBLE GLAZED	1500	2100	
D2	WOODEN FRAMED FLUSH DOOR - DOUBLE SHUTTER	1000	2100	
D3	WOODEN FRAMED FLUSH DOOR - SINGLE SHUTTER	1000	2100	
D4	- DO -	800	2100	
D	PVC DOOR	800	2100	
W	WOODEN FRAMED FULLY GLAZED WINDOW WITH GRILLS ABOVE 1500	1500	1700	
W1	- DO -	1000	1700	
V1	WOODEN FRAMED FULLY GLAZED VENTILATOR	900	600	
V2	- DO -	1200	600	

REVISION