


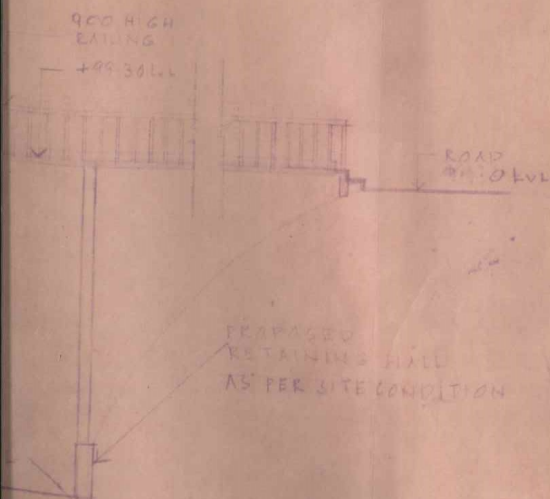

G. NOTES

THIS DRG. HAS BEEN PREPARED BASED ON THE APPROVED SKETCH DRG. BEARING NO. SA/AN-064/19/4744/2

BRIEF SPECIFICATION

FLOORING

- DORMITORIES SHALL HAVE CERAMIC TILES
- CORRIDOR, STAIR CASE, LOBBY, WAITING SHALL HAVE MOSAIC FLOORING OF 50% WHITE AND 50% GREY CEMENT.
- ENTRANCE VERANDAH, CONNECTING PASSAGE AND SIT OUT SHALL HAVE FACTORY MADE CEMENT TILES
- ALL ROOMS, DINING, OFFICE & W.C ROOM SHALL HAVE VETRIFIED CERAMIC TILES
- KITCHEN SHALL HAVE MOSAIC FLOORING OF 50% WHITE & 50% GREEN CEMENT
- TOILET SHALL HAVE GLAZED CERAMIC TILES

SKIRTING

- SHALL MATCH WITH THE FLOOR FINISH

DADO

- KITCHEN SHALL HAVE GLAZE CERAMIC TILE DADO ABOVE WORKTOP UPTO A HS OF 1600
- IN TOILET GLAZED CERAMIC TILES UPTO 1500 HT.

WORKTOP

- IN KITCHEN SHALL BE OF COTTA STONE

DOOR

- ENTRANCE DOOR SHALL BE ALUMINIUM FRAMED PANELLED DOOR
- ALL OTHER DOORS SHALL BE WOODEN FRAME FLUSH DOOR EXCEPT TOILET DOOR WHICH SHALL BE OF PVC

WINDOWS

- SHALL BE ALUMINIUM FRAMED GLAZED WINDOW WITH AL. GRILLS